

Features

- Pump-assisted flushing system with tank
- Comfortable seat height
- Auto open/close lid
- Kick open/close seat & lid
- Auto bowl pre-wetting before each use
- Feminine/posterior/movement wash and H/C massage
- Adjustable heated seat, warm air dryer and water temperature
- Adjustable nozzle position and cleaning water pressure
- Detachable, arc-shaped and self-cleaning nozzle
- UV sterilization
- Auto deodorization
- Foam shield
- Auto flush
- LED digital display and night light
- Dynamic ambient light
- Four seasons temperature sensing
- Eco-friendly energy-saving mode
- Blackout flush




Installation

- Standard 12" (305 mm) rough-in
- Electrical requirements: 16 Amps at AC 120 V, 60 Hz

Notes

- Install the product based on the installation instructions.
- Before installing the toilet, please reserve enough installation space.

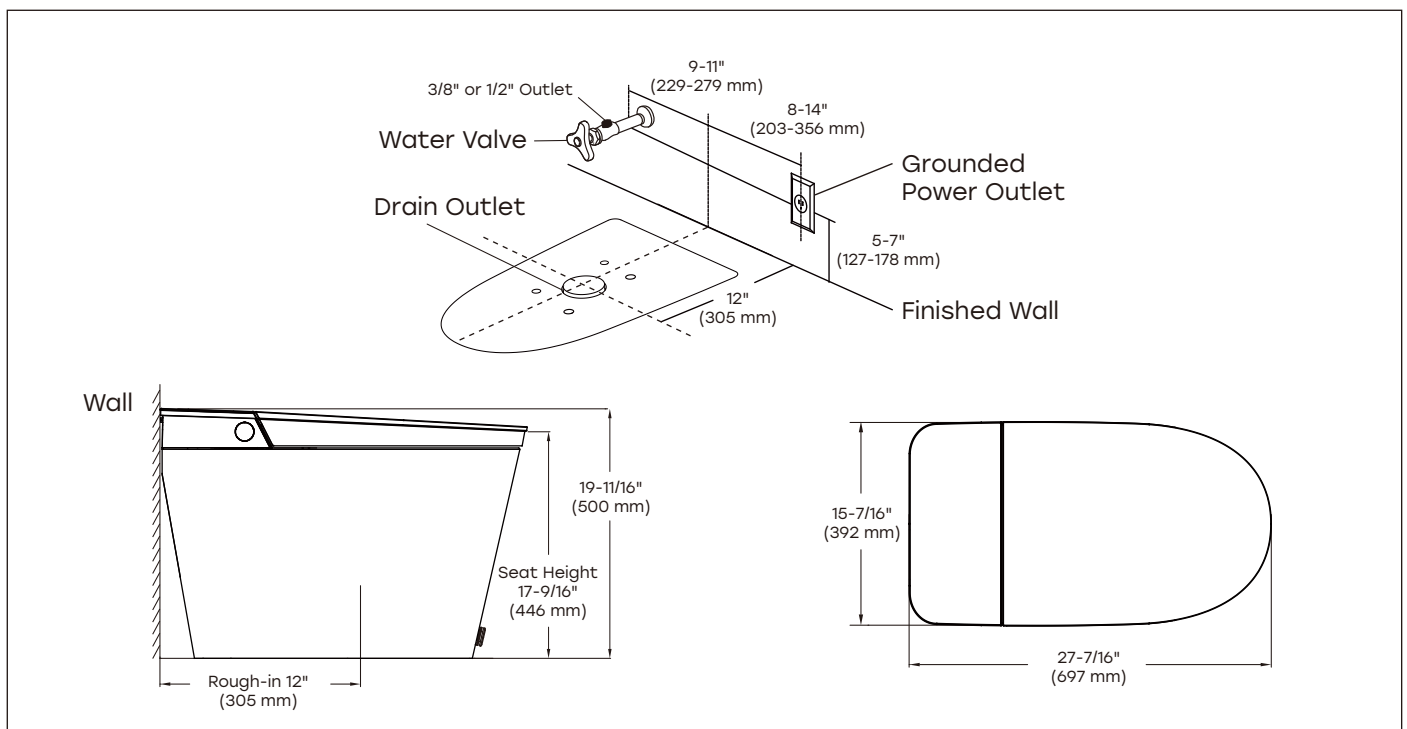

Technical Information

- All product dimensions are nominal.
- Dimensions: 27-7/16" (L) * 15-7/16" (W) * 19-11/16" (H)
 - Rough In Size: 12" (305 mm)
 - Gallons Per Flush (US gallon): 1.0/1.28 gpf
 - Installation Type: Floor-mount
 - Bowl Shape: Elongated
 - Power Cord Length: 35-7/16" (900 mm)
 - Min Water Pressure: 11.6 psi
 - Max Water Pressure: 108 psi

Parts Included

- Smart Toilet
- Installation Kit
- Remote Control & Batteries
- Installation Template
- Manual